

COWO

Customer wall outlet

Description

COWO is a fiber optic customer outlet that allows easy and unobtrusive termination of fiber optic cables in an office, home or communications room.


Features

- Accommodates two termination/splice connections
 - 2 SC simplex or 1 LC duplex adapters
 - 2 crimp, mechanical or heat shrink splices
- IP20 rated
- Very flat design, mounts on a standard flush mount electrical outlet
- Utilizes reduced bend radius fiber (G657.a and B)
- Possibility to invert the adapter in the holder to prevent disconnection when pulling the patch cords
- RoHS compliant
- Conforms to UL 94 V-O
- Lockable with screw or lead-wire seal
- Cable entrance from the bottom, left and rear
- Made of molded plastic (halogen free, LSZH-1), white (RAL 9010)

Technical Data

Number of input cable positions	4
Input cable diameter	3-7 mm
Max. capacity	2 fibers
Max. number of customer feeds	2 patch cords
Operating temperature	-40°C to +70°C
Material	PC-FR

- A 112
- B 115
- C 80
- D 24,5

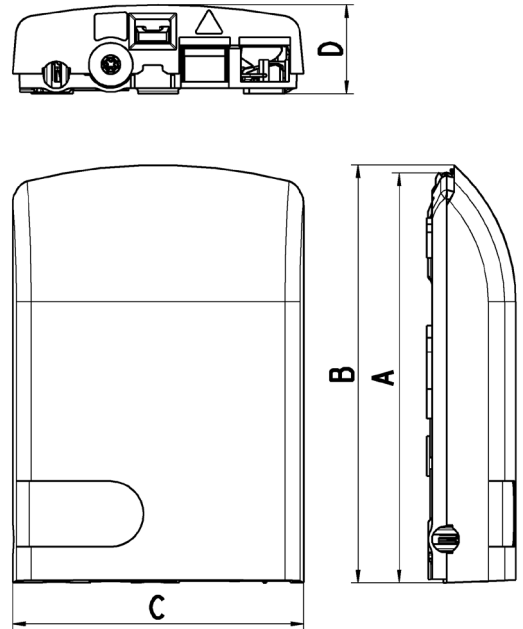

Ordering Information

COWO - XX XX

Connector type

- S1 SC/UPC
- S2 SC/APC
- L1 LC/UPC
- L2 LC/APC

Number of pigtails

- 0
- 1
- 2
- 4

Number of adapters

- 1
- 2

Accessories

For cable splicing, a strain relief can be installed instead of an adapter at the same position.

- FTX-7029 1 900-30 Strain Relief for TWO cable up to 3,0mm diameter
- FTX-7029 1 900-50 Strain Relief for ONE cable up to 4,2mm diameter

COWO will always be delivered with at least one adapter.

For more technical options and order quantity information, please consult your local sales representative.

TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem bvba
 Diestsesteenweg 692
 3010 Kessel-Lo, Belgium
 Tel 32-16 351 011 (USA)1-919-557-8900
 Fax 32-16 351 697(USA)1-919-557-8498
 www.te.com
 www.telecomnetworks.com
 TC 1099/DS/3 08/13

